


SNACK BAG

Mounting instructions

Please note: Attaching bags to your bike may cause damage to its paintwork. To protect against wear and tear, we recommend applying protective tape over attachment points on your bike's frame before using any bags.

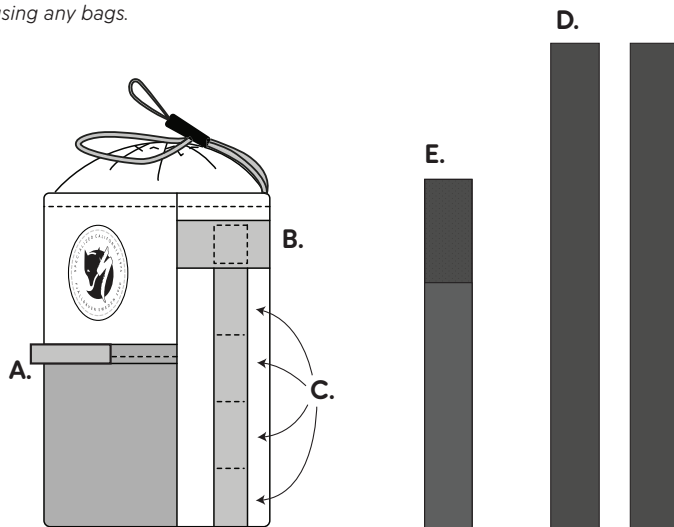

1. Orient Snack Bag so that the webbing loop (A) on mesh pocket is facing the rider. This works on both sides of stem. Locate three appropriate webbing loop positions for handle bar (B), stem (B) and headset (C).
2. Insert the two velcro straps (D) in horizontal webbing loops (B). Insert with soft side out. When in position, flip the velcro so the hook side is facing out.
3. Attached velcro with velcro protective tape (E) in vertical webbing loops (C) on Snack Bag. If velcro strap is too long, trim to adapt.
4. Attach velcro loops (D) around stem and handle bar. If velcro straps are too long, trim to adapt.
5. Attach webbing adjuster (E) around headset for extra stability. *
6. Max. load 1.5kg/3.3lbs
7. If you use two Snack Bags, attachment on headset and stem can be shared between the two.

**Fixed velcro towards moving headset might cause chafing.*

SNACK BAG

Mounting instructions



WARNING! Install, open or access the bags only when the bicycle is not in motion. Doing so while riding can make you lose control and fall and can result in serious injury. **WARNING!**

Before riding with any bags, make sure they are securely installed, and all cargo items are securely stored. Failure to do so may result in bags coming loose or items falling out, both of which can make you lose control and fall and can result in serious injury. Adding cargo to your bicycle may affect its handling. Before your first ride, you should practice riding with a cargo bag installed and loaded in a controlled environment away from traffic.